



# INTERLIGHT DREAM<sup>+</sup> LED PANEL 3.500K

DATASHEET IL-P595K35UCC & IL-P195K35UCC






# INTERLIGHT DREAM+ LED PANEL 3.500K

DATASHEET IL-P595K35UCC

<b>Item number</b>	IL-P595K35UCC
<b>GTIN</b>	8719214379810
<b>Brand</b>	Interlight
<b>Series</b>	Dream+
<b>Type</b>	LED
<b>Color temperature (Kelvin)</b>	3500
<b>Color Rendering Index (CRI)</b>	97
<b>Unified Glare Rating (UGR)</b>	<19
<b>Lumen output (lm)</b>	4000
<b>Power consumption incl. driver</b>	34
<b>Beam angle</b>	>80°
<b>Nom.voltage AC (V)</b>	230
<b>Driver included</b>	No
<b>Material of fixture</b>	Aluminium, plastic
<b>Color of fixture</b>	White
<b>Ingress Protection (IP)</b>	20
<b>Impact resistance (IK)</b>	02
<b>Suitable for emergency lighting</b>	Yes
<b>With motion sensor</b>	No
<b>With daylight sensor</b>	No
<b>Suitable for wall mounting</b>	No
<b>Suitable for pendant mounting</b>	Yes
<b>Suitable for ceiling mounting</b>	Yes
<b>Suitable for surface mounting</b>	Yes
<b>Suitable for recessed mounting</b>	Yes
<b>Suitable for office workspaces (EN12464-1)</b>	Yes
<b>Power factor</b>	0.95
<b>Length (mm)</b>	595
<b>Width (mm)</b>	595
<b>Height (mm)</b>	11
<b>Guarantee (years)</b>	5

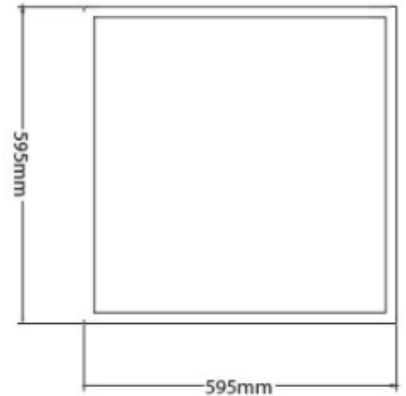

## ACCESSORIES


<b>IL-X3D40</b>	Led driver dip switch 650-1000mA on/off
<b>IL-X2D40-1-10</b>	Led driver dip switch 400-1100mA 1-10V dimmable
<b>IL-D48DALI2L</b>	Led driver max. 1100mA DALI2 dimmable
<b>IL-DCISET+</b>	Emergency module with battery backup
<b>IL-P595SK4</b>	Panel surface mounting kit 60x60cm
<b>IL-PKITMN60</b>	Panel pendant mounting kit 60x60cm



# INTERLIGHT DREAM+ LED PANEL 3.500K

DATASHEET IL-P195K35UCC

<b>Item number</b>	IL-P195K35UCC
<b>GTIN</b>	8719214379827
<b>Brand</b>	Interlight
<b>Series</b>	Dream+
<b>Type</b>	LED
<b>Color temperature (Kelvin)</b>	3500
<b>Color Rendering Index (CRI)</b>	97
<b>Unified Glare Rating (UGR)</b>	<19
<b>Lumen output (lm)</b>	3800
<b>Power consumption incl. driver</b>	34
<b>Beam angle</b>	>80°
<b>Nom.voltage AC (V)</b>	230
<b>Driver included</b>	No
<b>Material of fixture</b>	Aluminium, plastic
<b>Color of fixture</b>	White
<b>Ingress Protection (IP)</b>	20
<b>Impact resistance (IK)</b>	02
<b>Suitable for emergency lighting</b>	Yes
<b>With motion sensor</b>	No
<b>With daylight sensor</b>	No
<b>Suitable for wall mounting</b>	No
<b>Suitable for pendant mounting</b>	Yes
<b>Suitable for ceiling mounting</b>	Yes
<b>Suitable for surface mounting</b>	Yes
<b>Suitable for recessed mounting</b>	Yes
<b>Suitable for office workspaces (EN12464-1)</b>	Yes
<b>Power factor</b>	0.95
<b>Length (mm)</b>	1195
<b>Width (mm)</b>	295
<b>Height (mm)</b>	11
<b>Guarantee (years)</b>	5

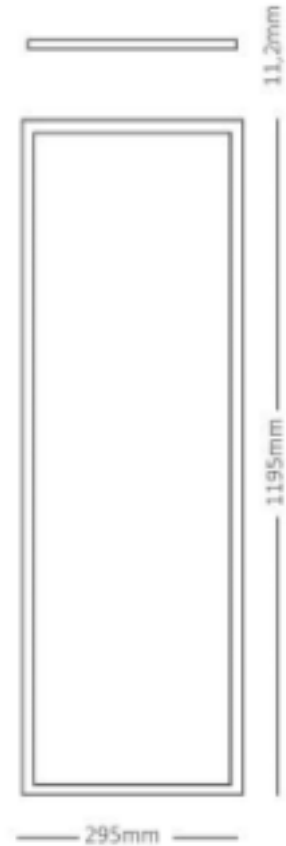

## ACCESSORIES

<b>IL-X3D40</b>	Led driver dip switch 650-1000mA on/off
<b>IL-X2D40-1-10</b>	Led driver dip switch 400-1100mA 1-10V dimmable
<b>IL-D48DALI2L</b>	Led driver max. 1100mA DALI2 dimmable
<b>IL-DCISET+</b>	Emergency module with battery backup
<b>IL-P195SK4</b>	Panel surface mounting kit 120x30cm
<b>IL-PKITMN120</b>	Panel pendant mounting kit 120x30cm



**KOOPMAN**INTERLIGHT.NL